




**W**e designed a practical driven shapes for narrow spaces and pleasant outdoor ambience. These “punch” are ideal for those who want design and innovation combined with the strength and the approach of Architects.

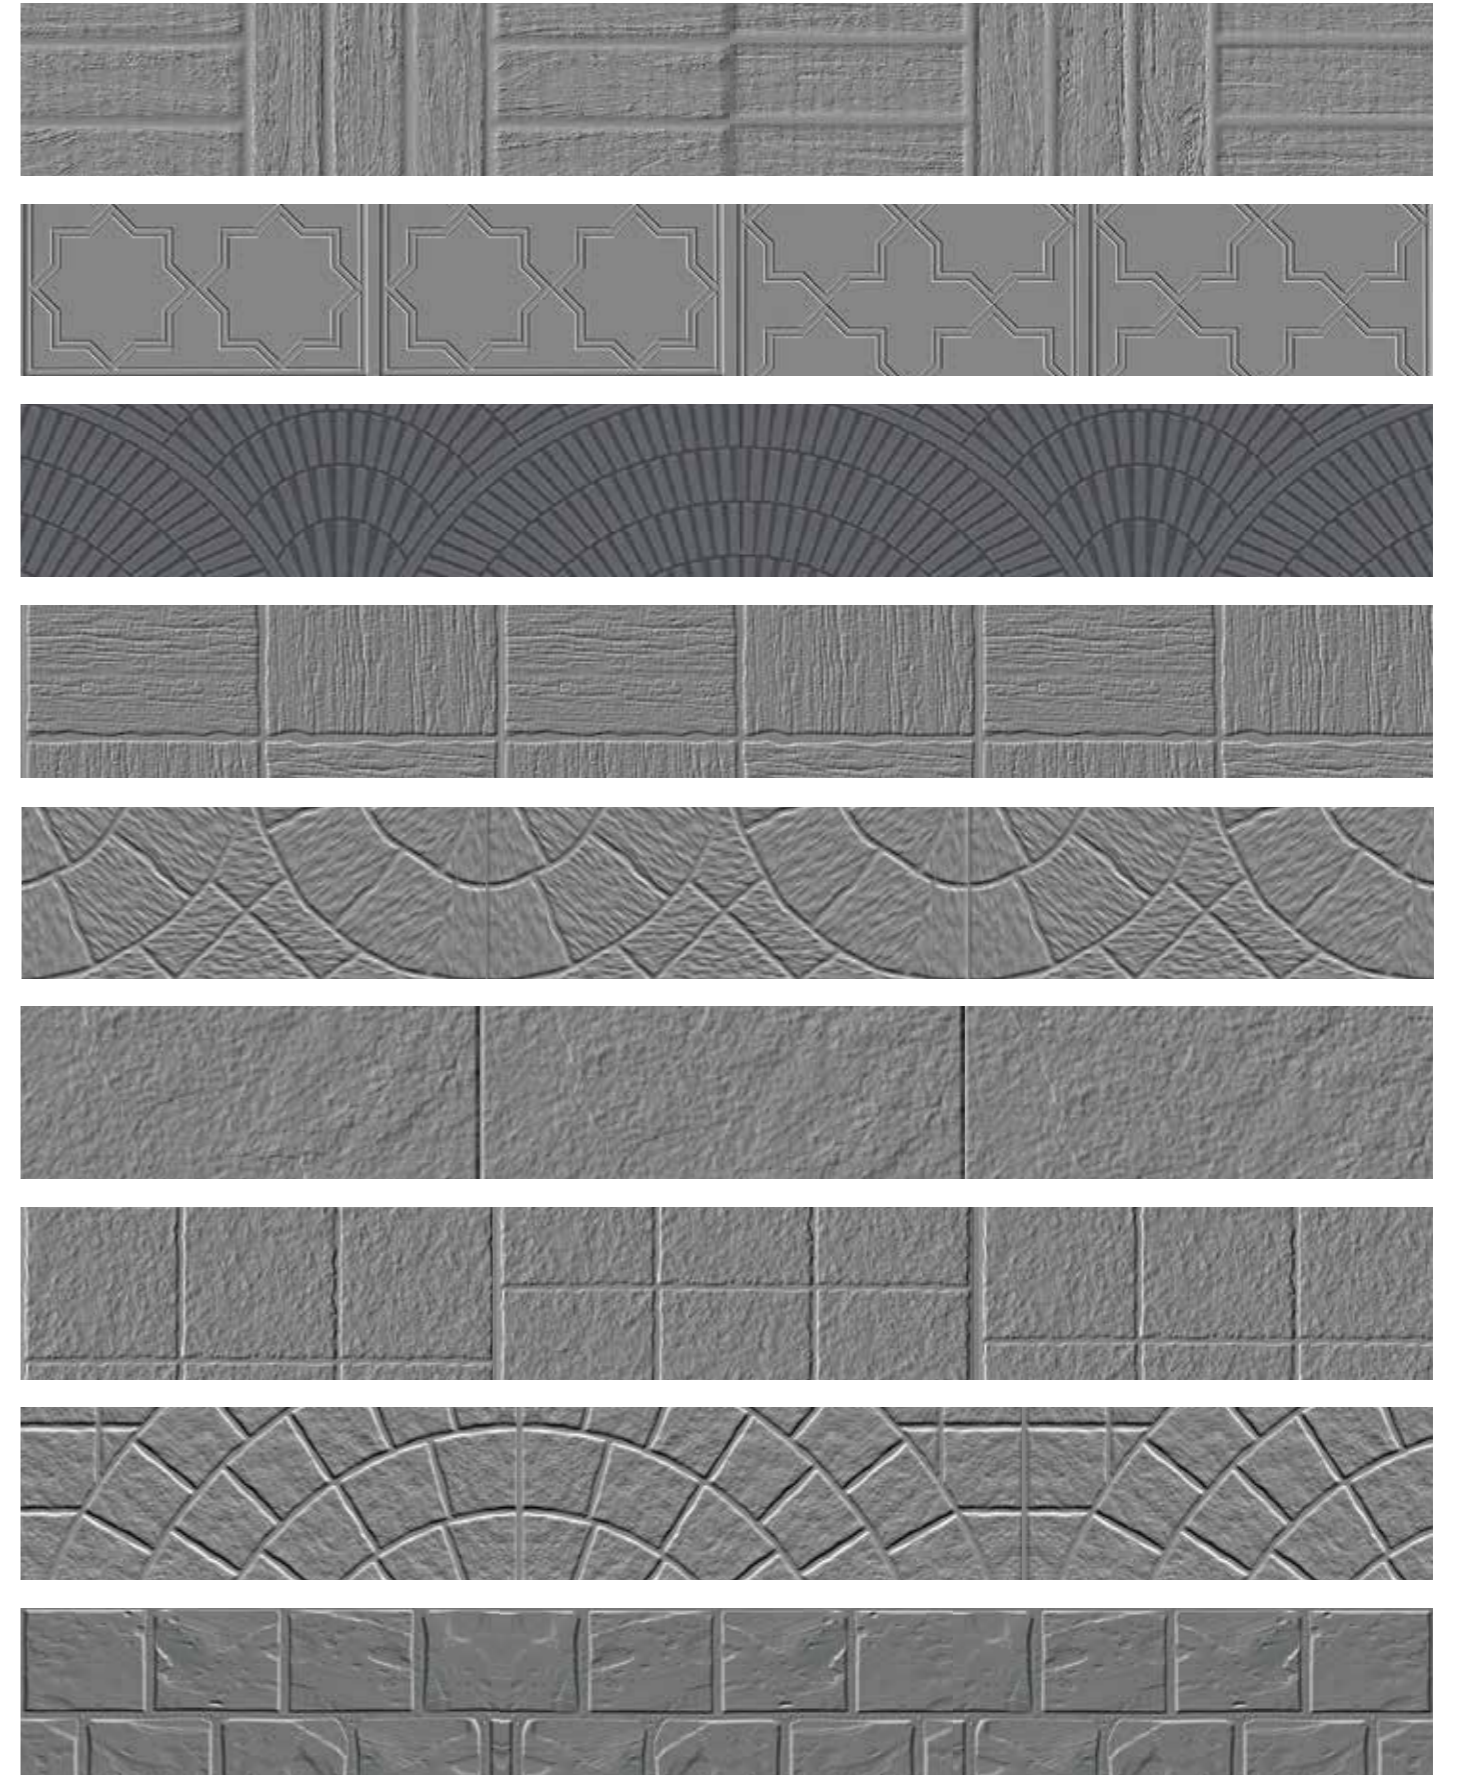

# CONTENTS

Art and design merges with the strength, in the pursuit of a brand new visual outdoor experiences, unaltered with the same traditional technology.

## INDEX



SWASTIK.....06



TIC TAC.....26



OCTA.....08




TARGET.....28



FAN.....12



BLOCK.....34



SLATE.....16



RHYTHM.....38




MOSAIC.....20



CRUST.....22

400 X 400 mm

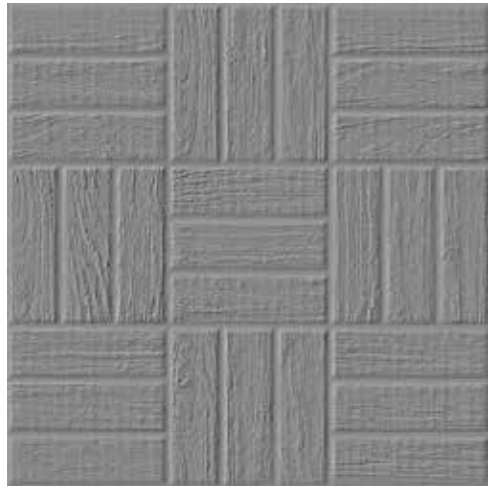

Punch




SW\_01

12 mm



SW\_02

12 mm

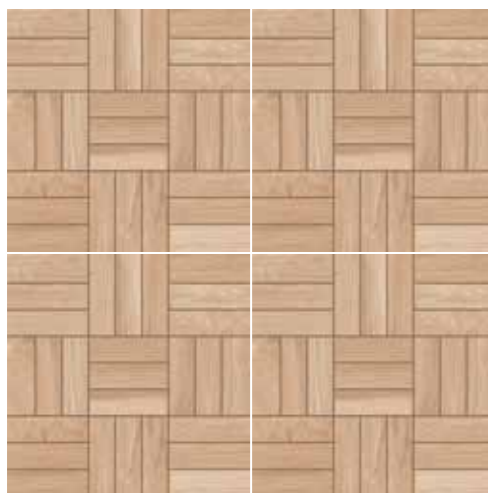

SW\_03

12 mm




DIFFERENT PATTERN: Other color



# OCTA

400 X 400 mm

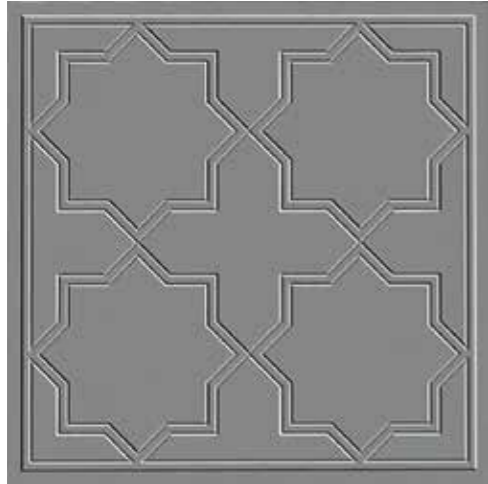


Punch




OC\_01

12 mm

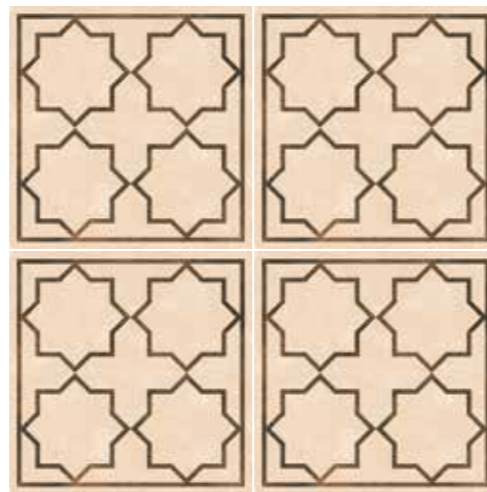

OC\_02

12 mm

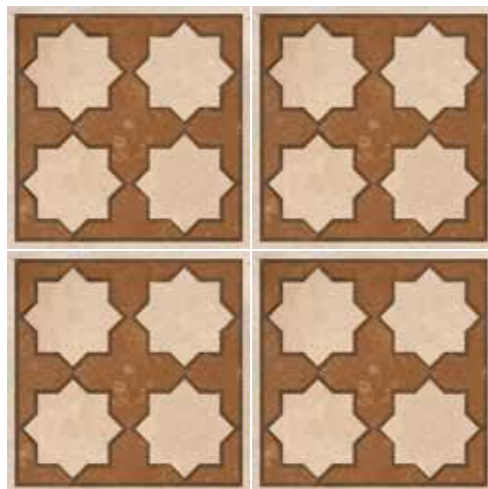

OC\_03

12 mm




OC\_04

12 mm



DIFFERENT PATTERN: Other color

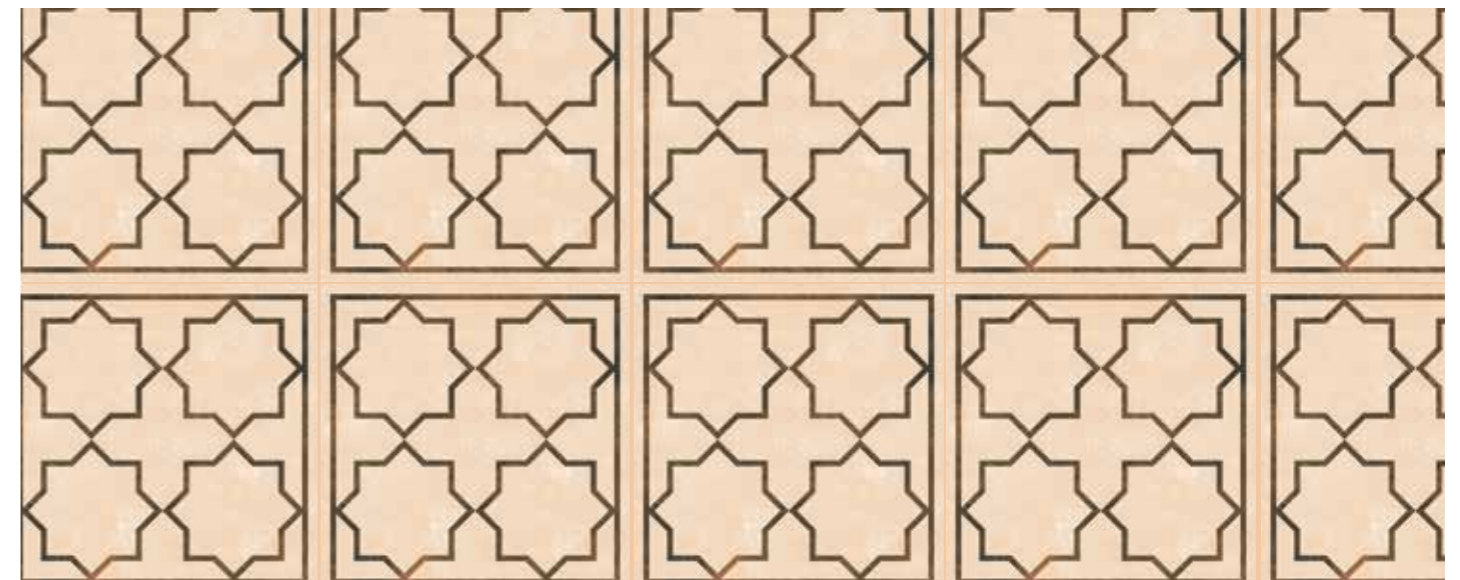


400 X 400 mm




OC\_05

12 mm

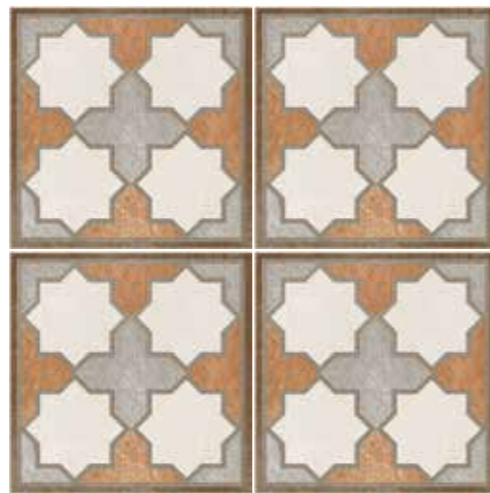


OC\_06

12 mm

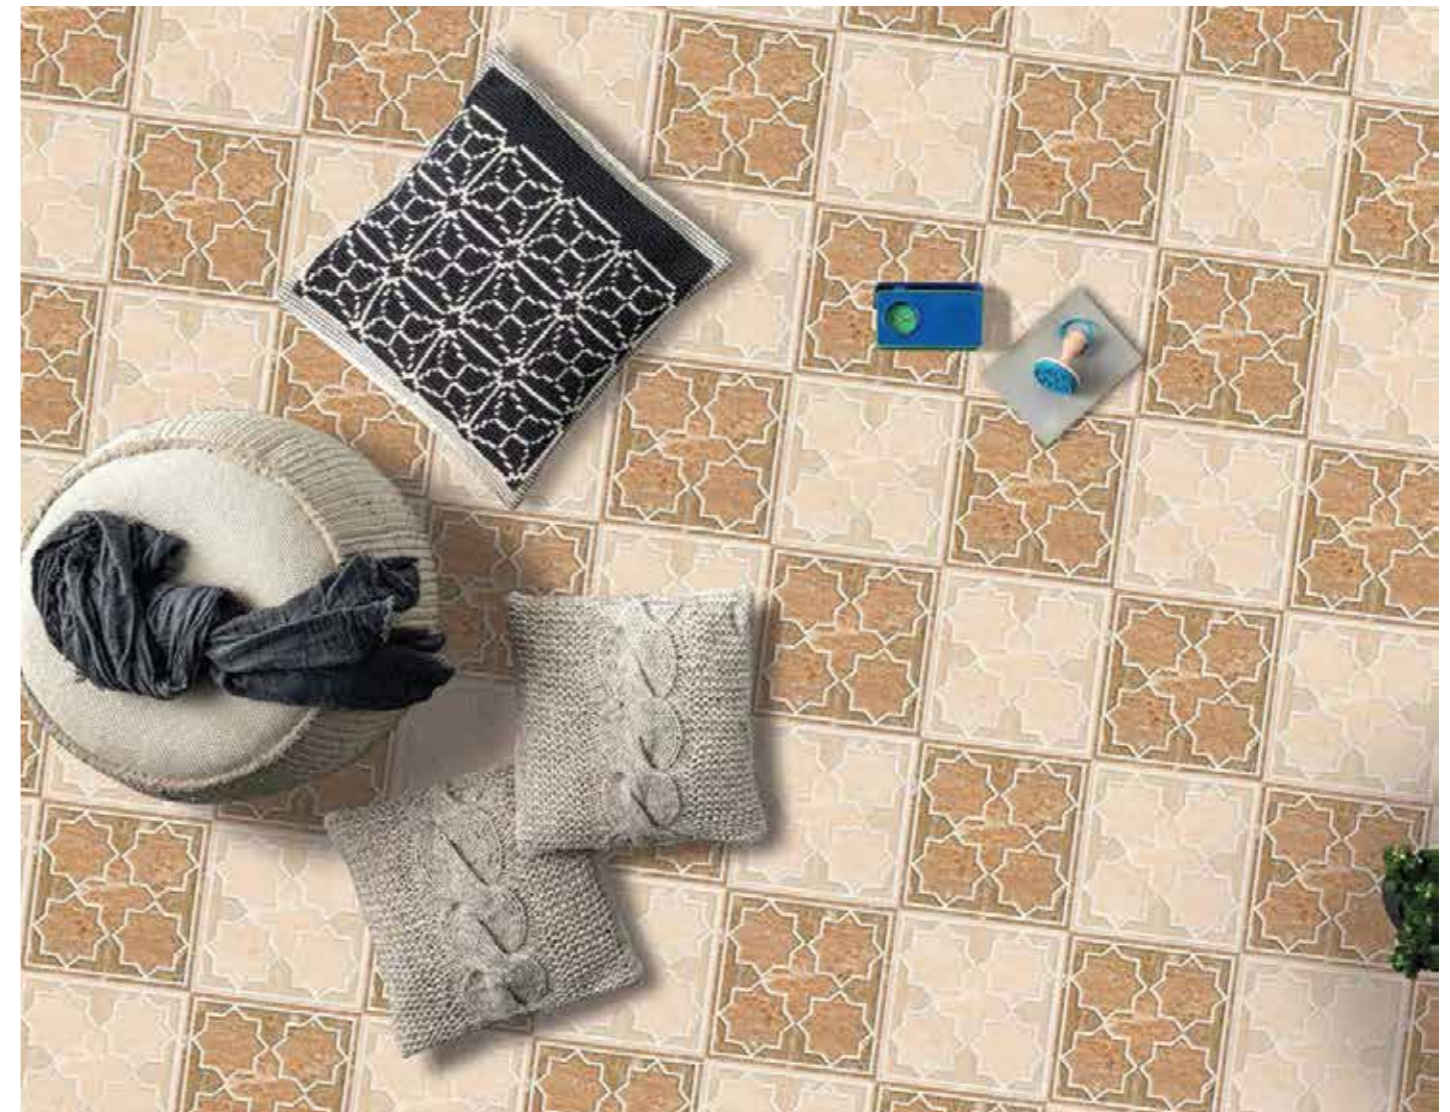

DIFFERENT PATTERN: Other color

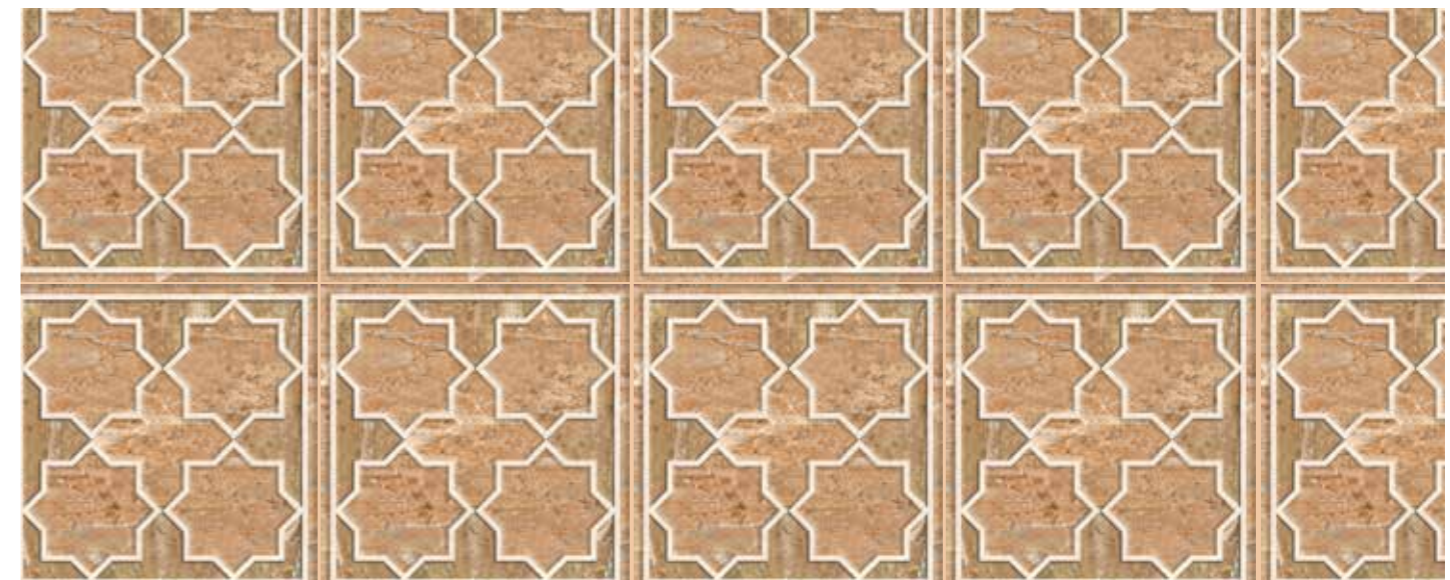

400 X 400 mm



Punch



FA\_01

12 mm




FA\_02

12 mm



FA\_03

12 mm

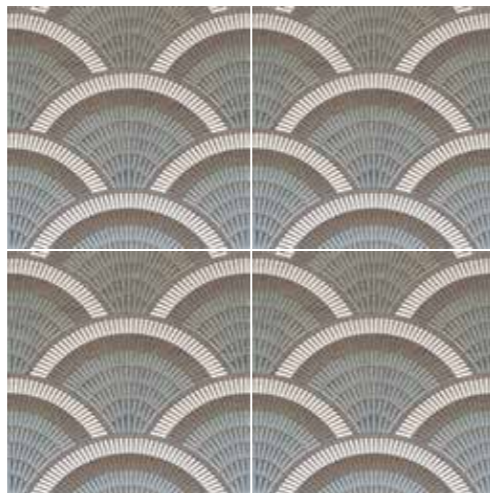

FA\_04

12 mm



DIFFERENT PATTERN: Other color



400 X 400 mm



FA\_05

12 mm




FA\_06

12 mm



FA\_07

12 mm

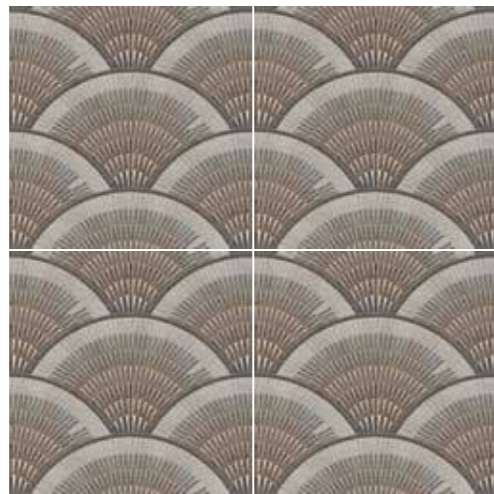


FA\_08

12 mm



FA\_09

12 mm

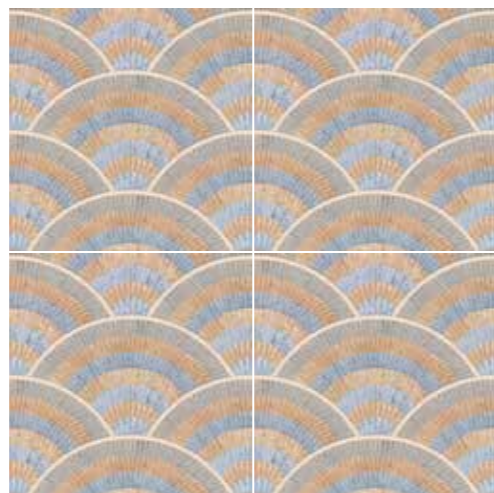

FA\_10

12 mm



DIFFERENT PATTERN: Other color






# SLATE



400 X 400 mm

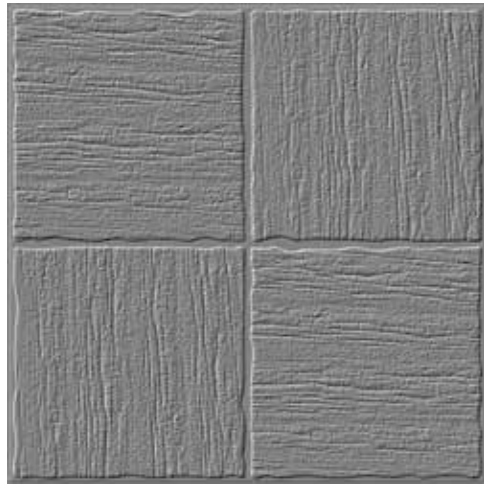


Punch




SL\_01

12 mm

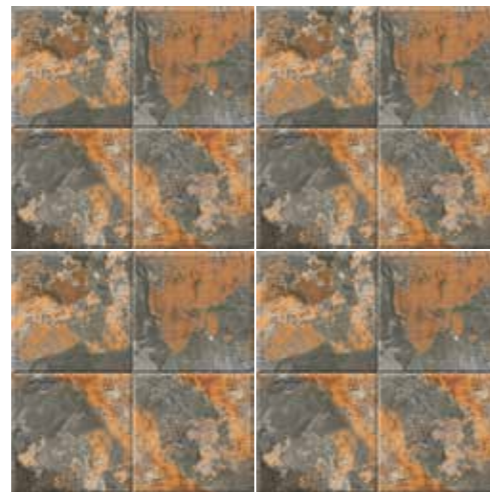


SL\_02

12 mm

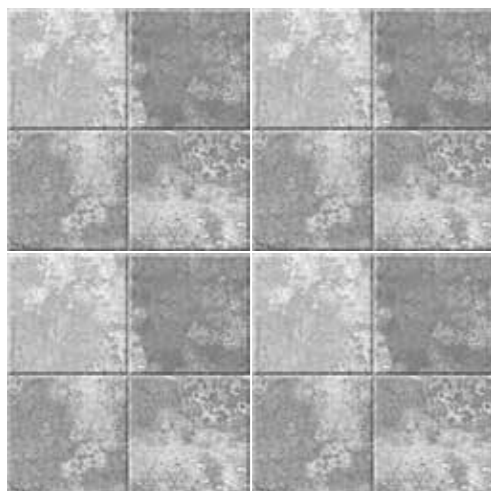

SL\_03

12 mm

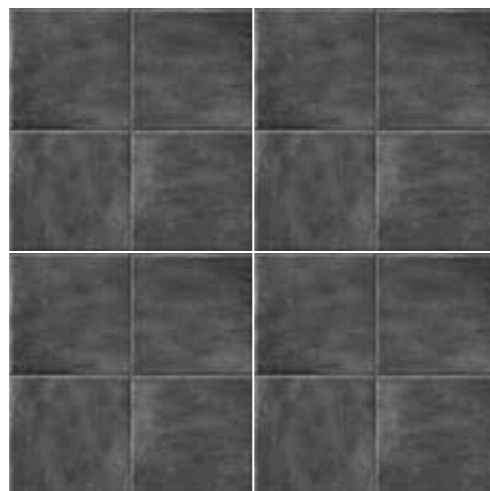


SL\_04

12 mm




DIFFERENT PATTERN: Other color

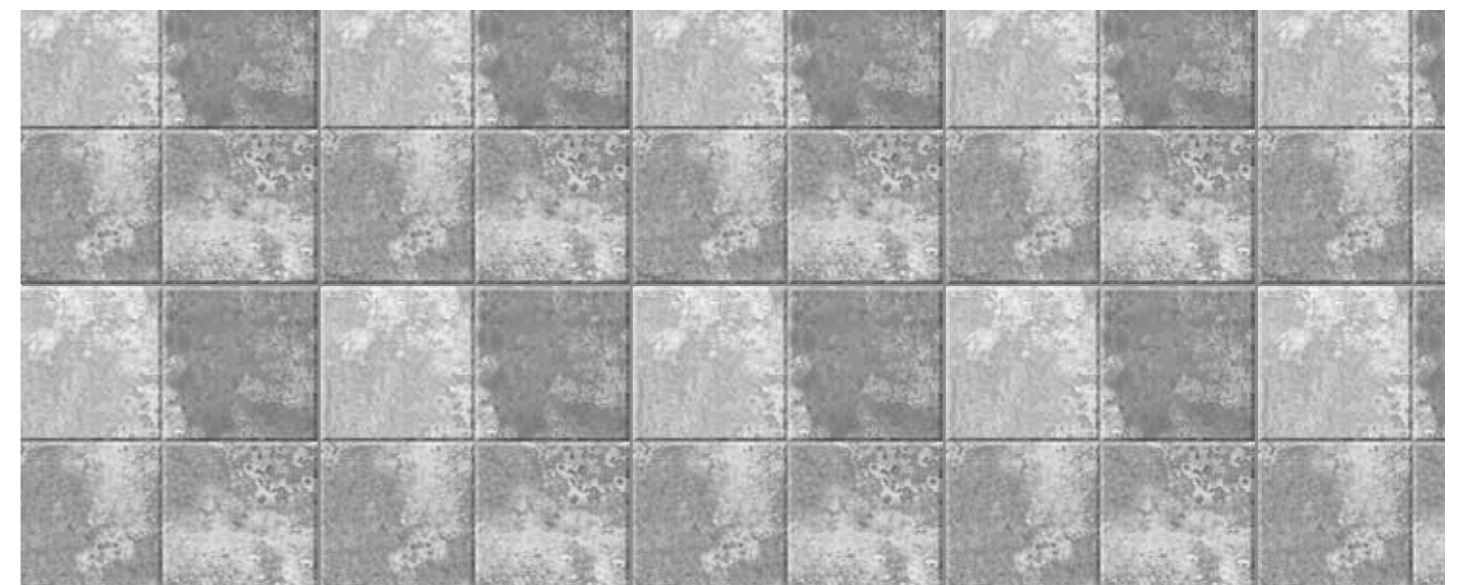

# SLATE




400 X 400 mm

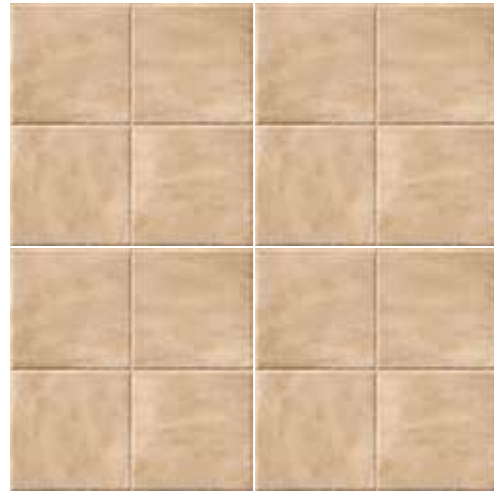

SL\_05

12 mm

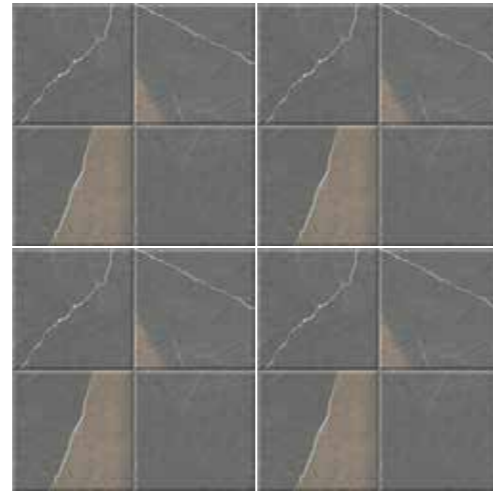


SL\_06

12 mm



SL\_07


12 mm

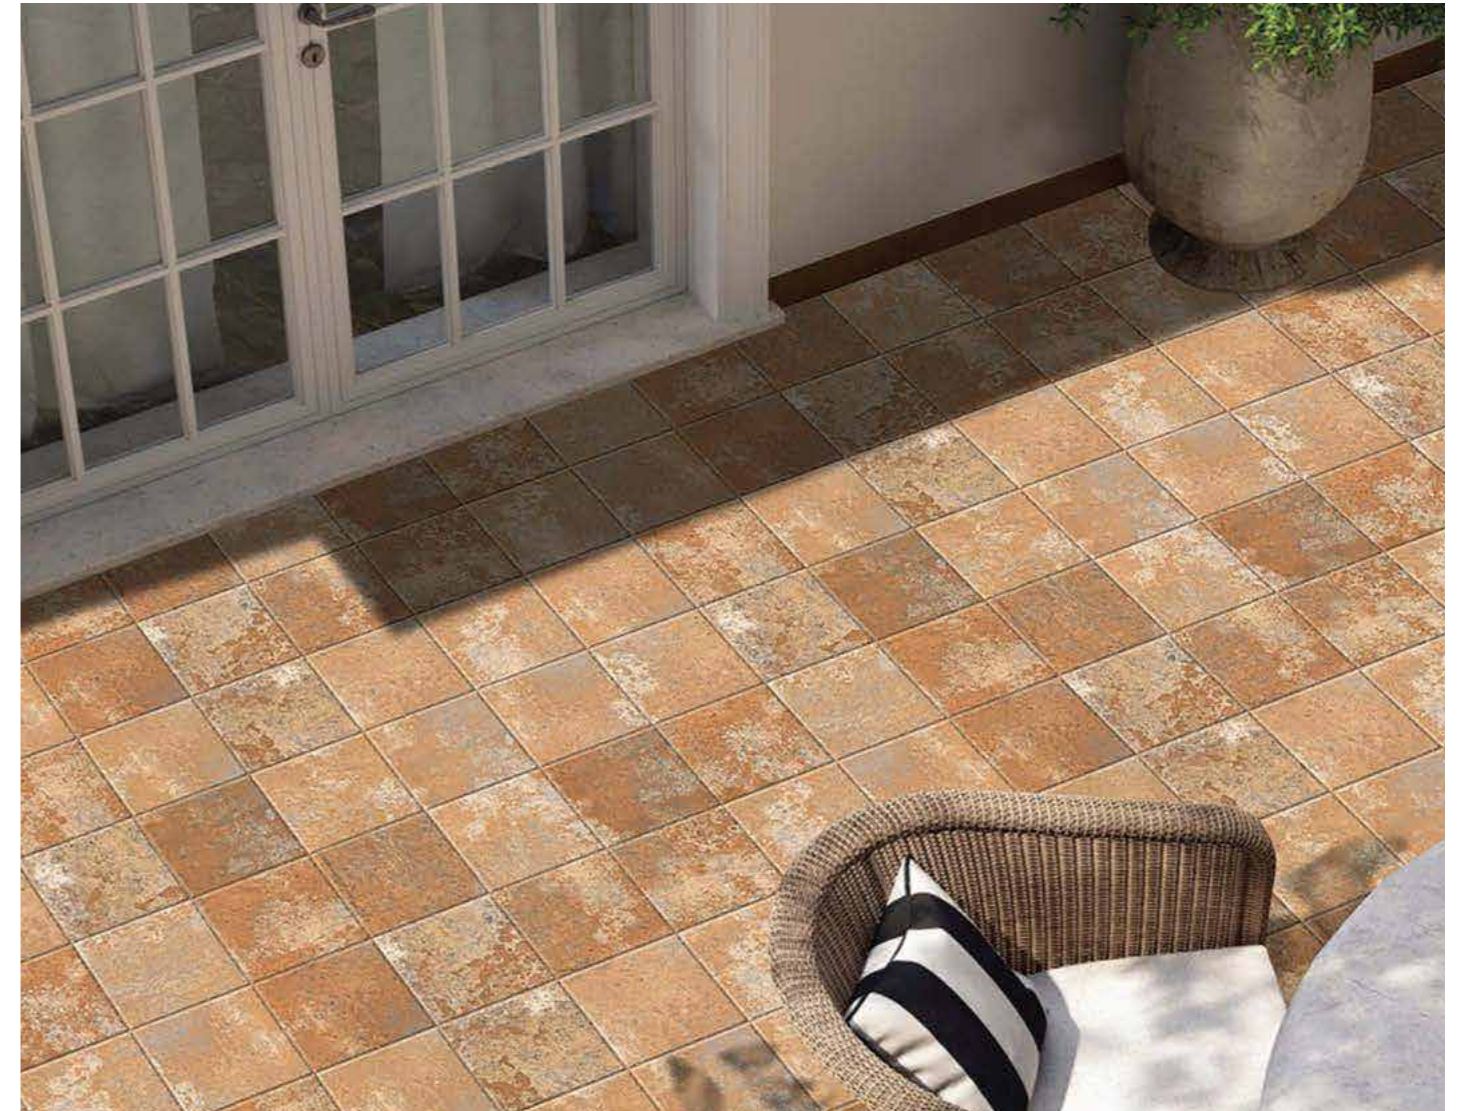

DIFFERENT PATTERN: Other color



400 X 400 mm

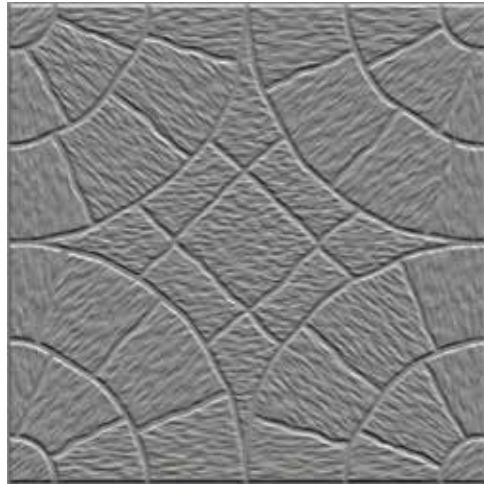


Punch



MO\_01

12 mm

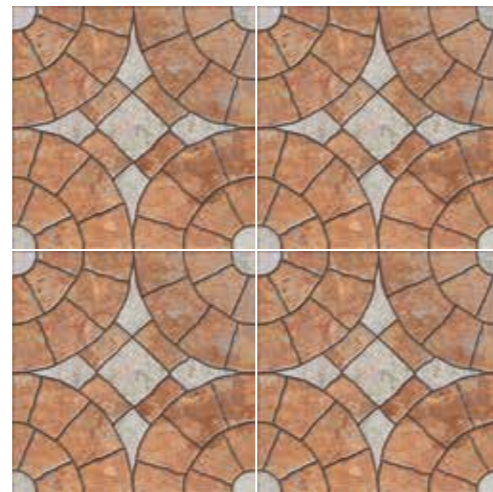

MO\_02

12 mm



MO\_03

12 mm




DIFFERENT PATTERN: Other color



# CRUST

400 X 400 mm

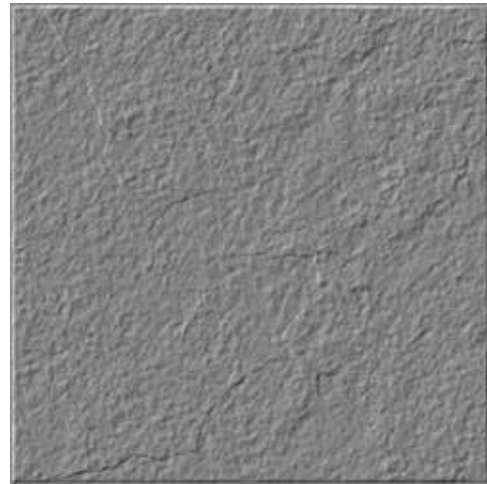

Punch



CR\_01

12 mm



CR\_02

12 mm



CR\_03

12 mm



CR\_04

12 mm



DIFFERENT PATTERN: Other color



# CRUST




400 X 400 mm



CR\_05

20 mm

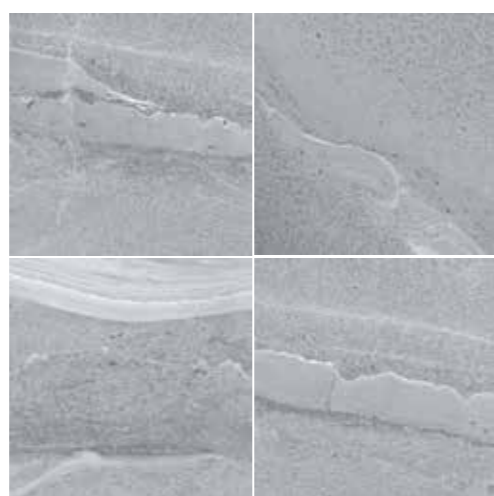


CR\_06

20 mm



CR\_07


20 mm

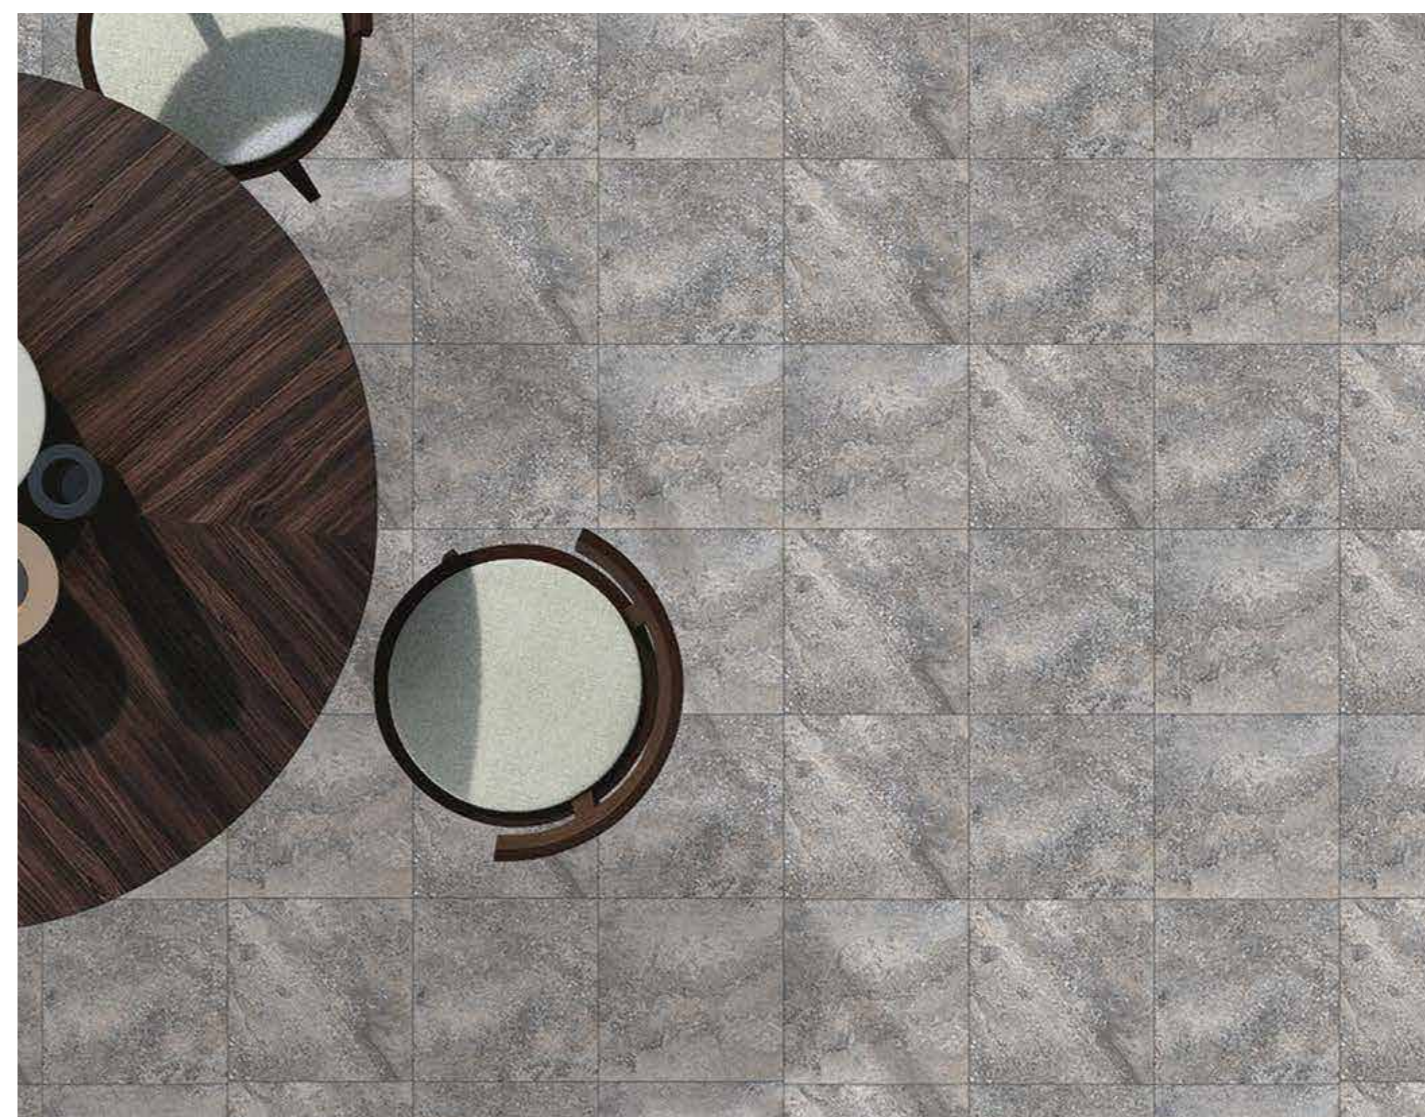

DIFFERENT PATTERN: Other color



400 X 400 mm

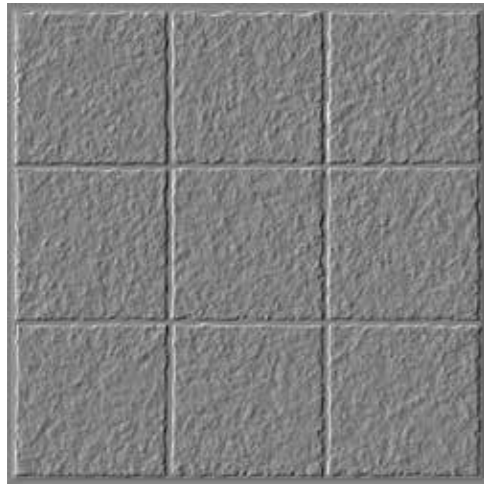


Punch



TI\_01

12 mm

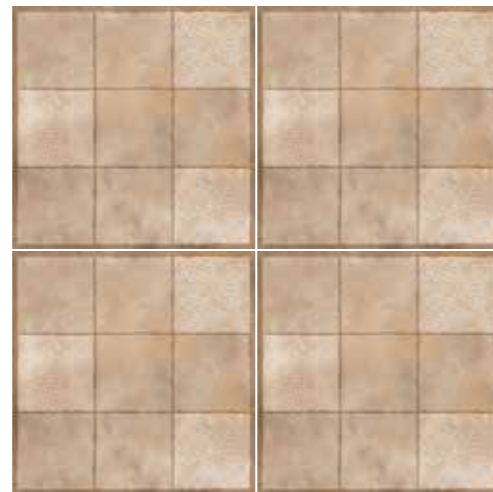

TI\_02

12 mm



TI\_03


12 mm



DIFFERENT PATTERN: Other color



400 X 400 mm

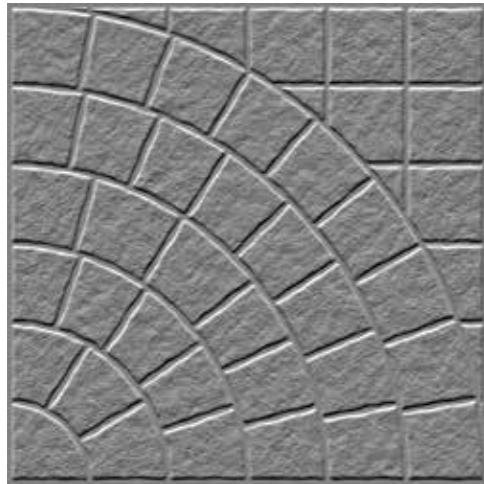

Punch




TA\_01

12 mm




TA\_02

12 mm

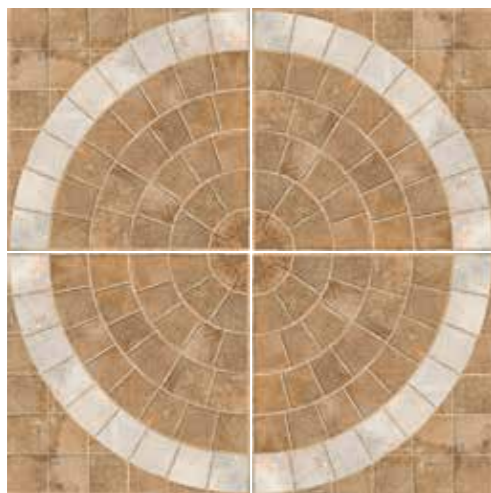

TA\_03

12 mm

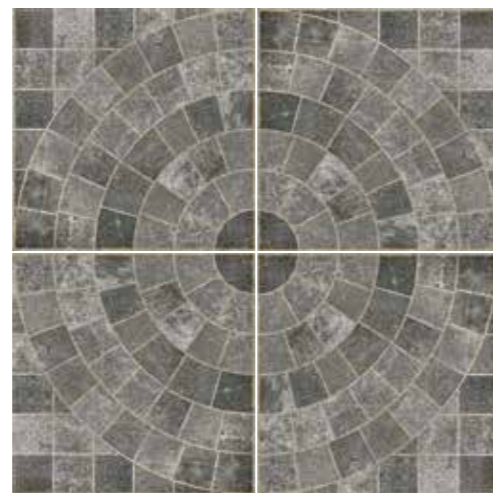

TA\_04


12 mm



DIFFERENT PATTERN: Other color



400 X 400 mm

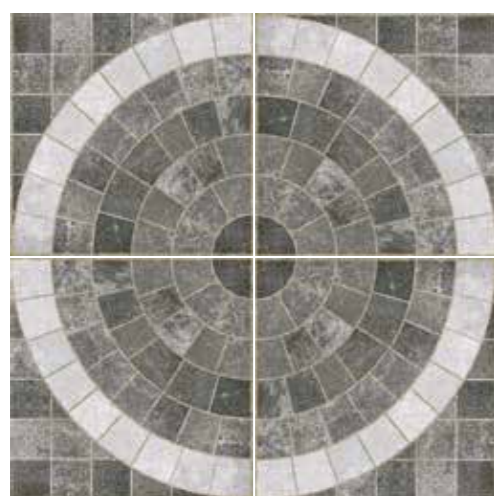


TA\_05  12 mm



TA\_06  12 mm



TA\_07  12 mm

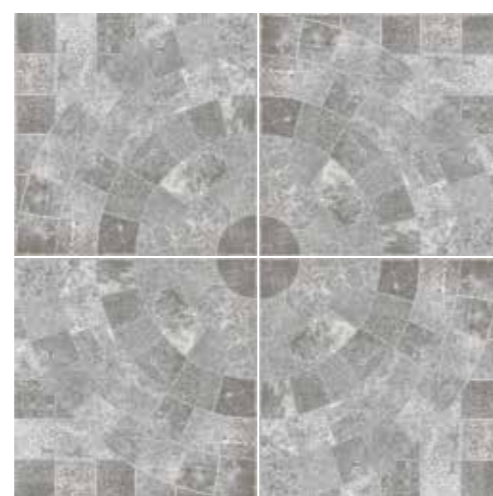


TA\_08  12 mm



TA\_09  12 mm



TA\_10  12 mm

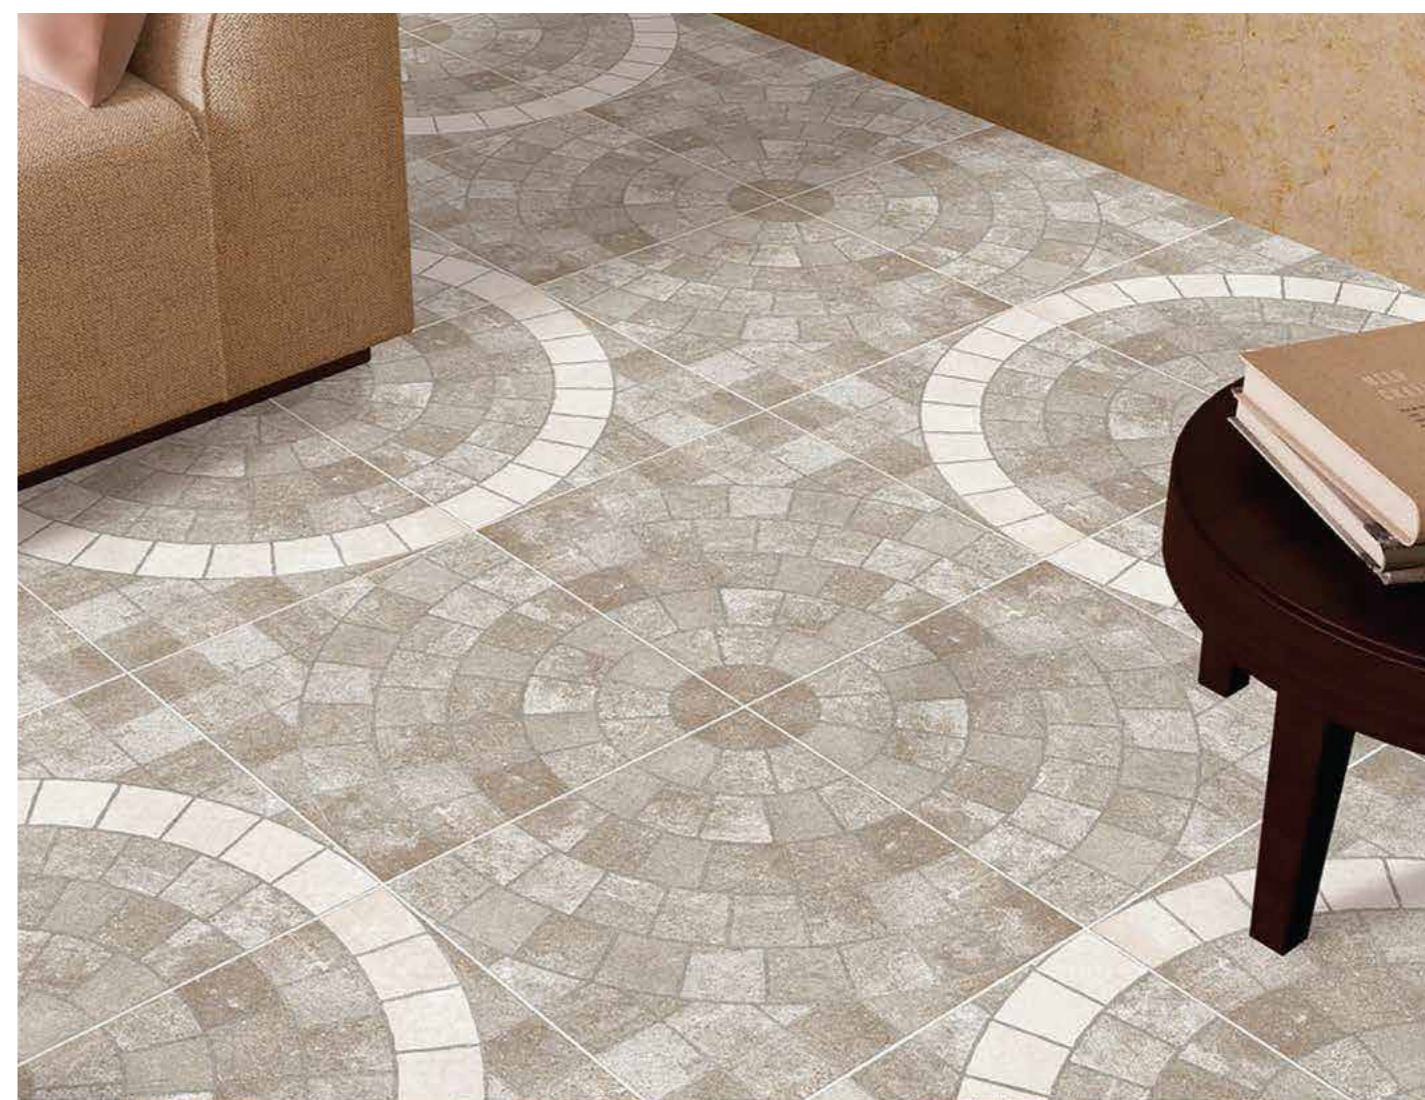


DIFFERENT PATTERN: Other color





400 X 400 mm

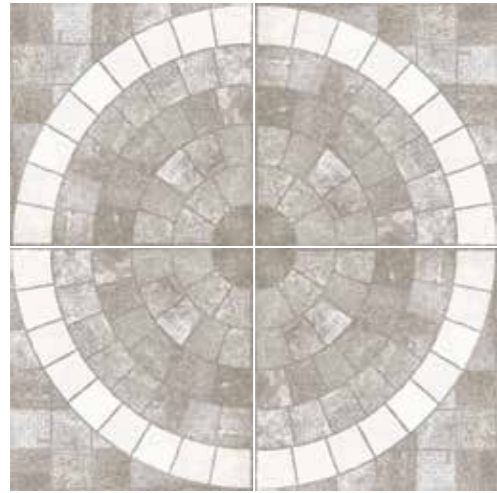

TA\_11

12 mm




TA\_12

12 mm



TA\_13

12 mm

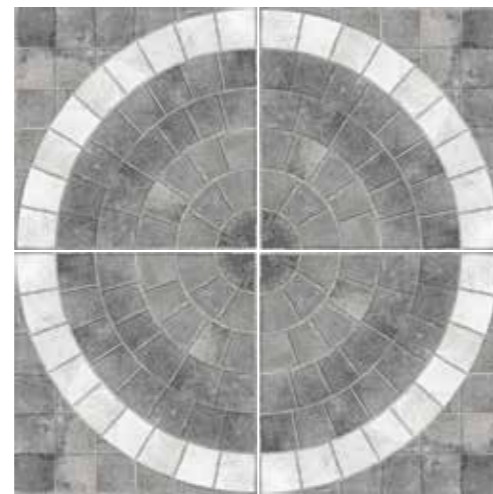


TA\_14

12 mm




DIFFERENT PATTERN: Other color

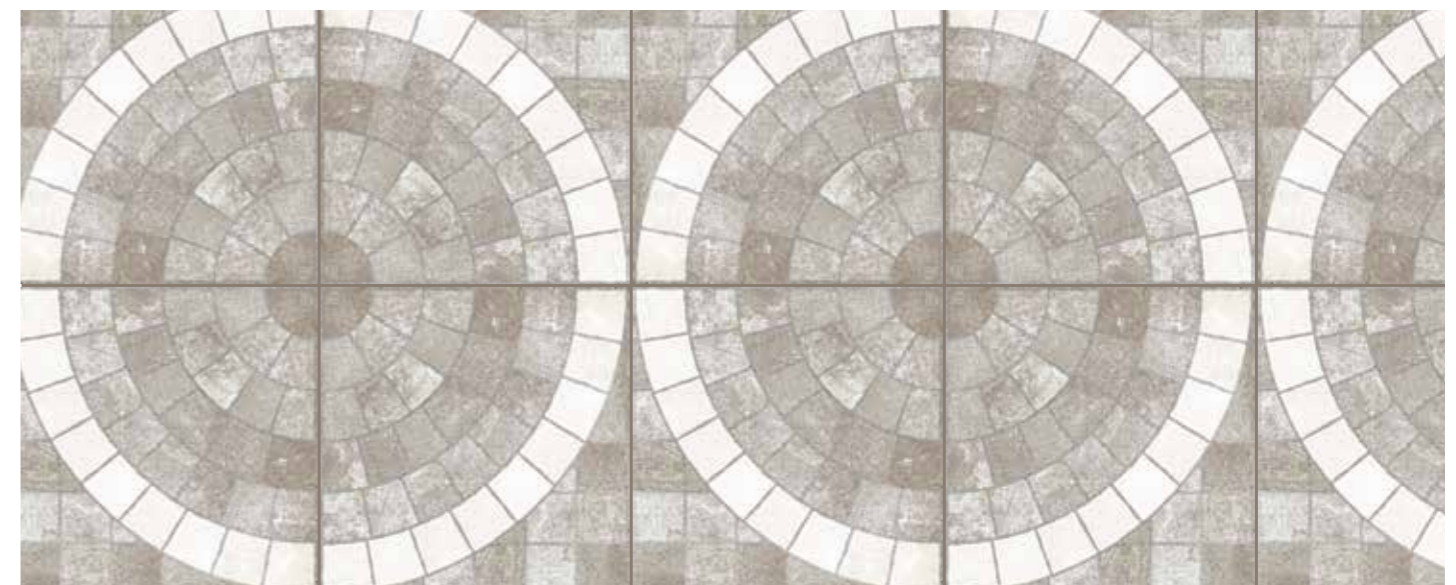

# BLOCK




400 X 400 mm

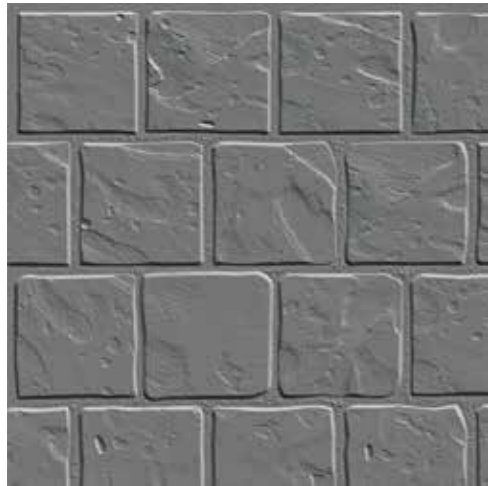

Punch




BL\_01



BL\_02



BL\_03



BL\_04



DIFFERENT PATTERN: Other color



# BLOCK



400 X 400 mm



BL\_05


12 mm




DIFFERENT PATTERN: Other color




400 X 400 mm

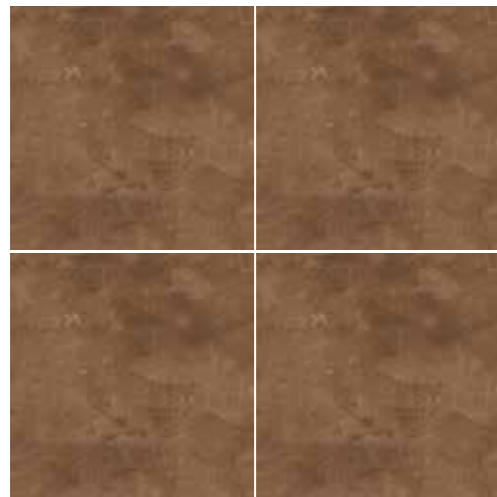


RH\_01 12 mm

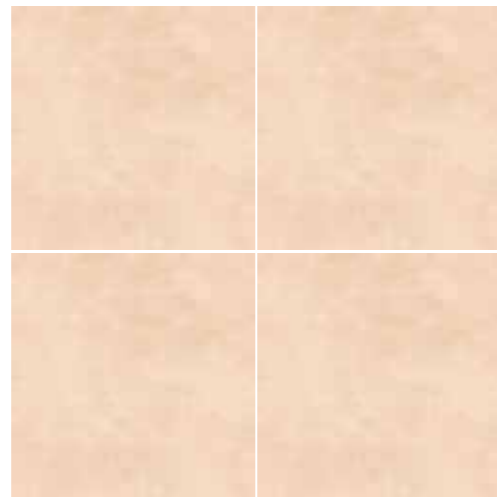


RH\_02 12 mm

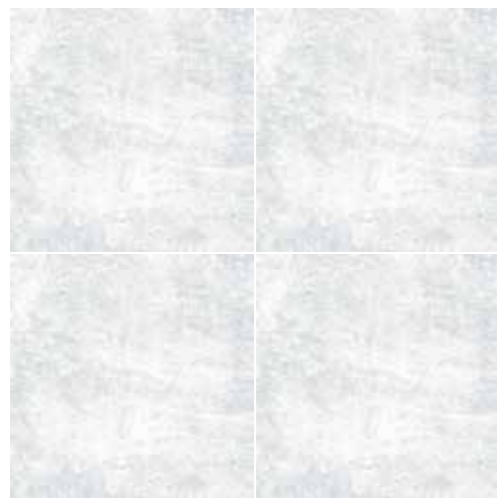


RH\_03 12 mm

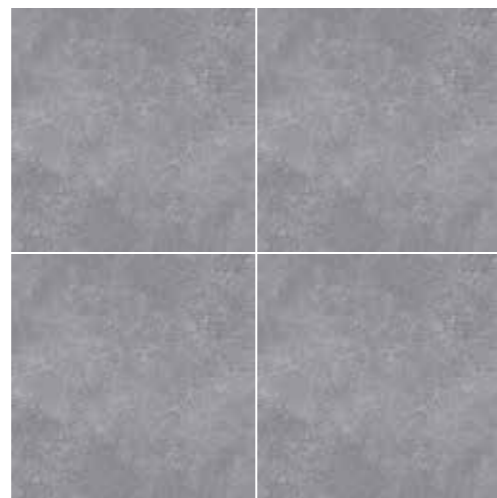


RH\_04 12 mm

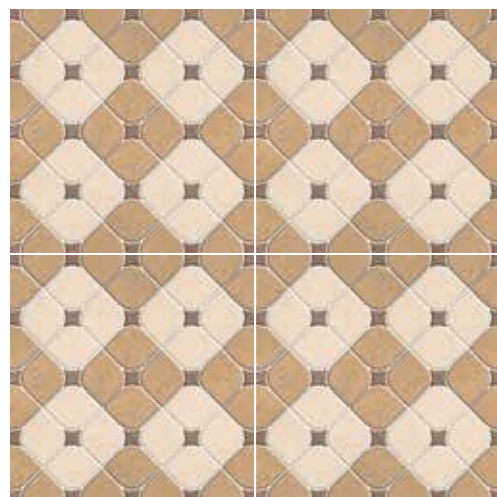


RH\_05 12 mm

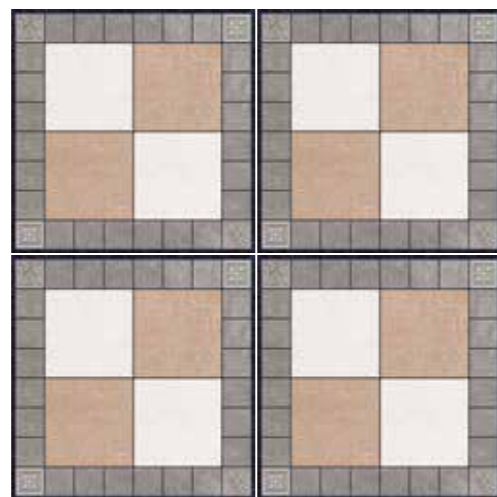

RH\_06 12 mm

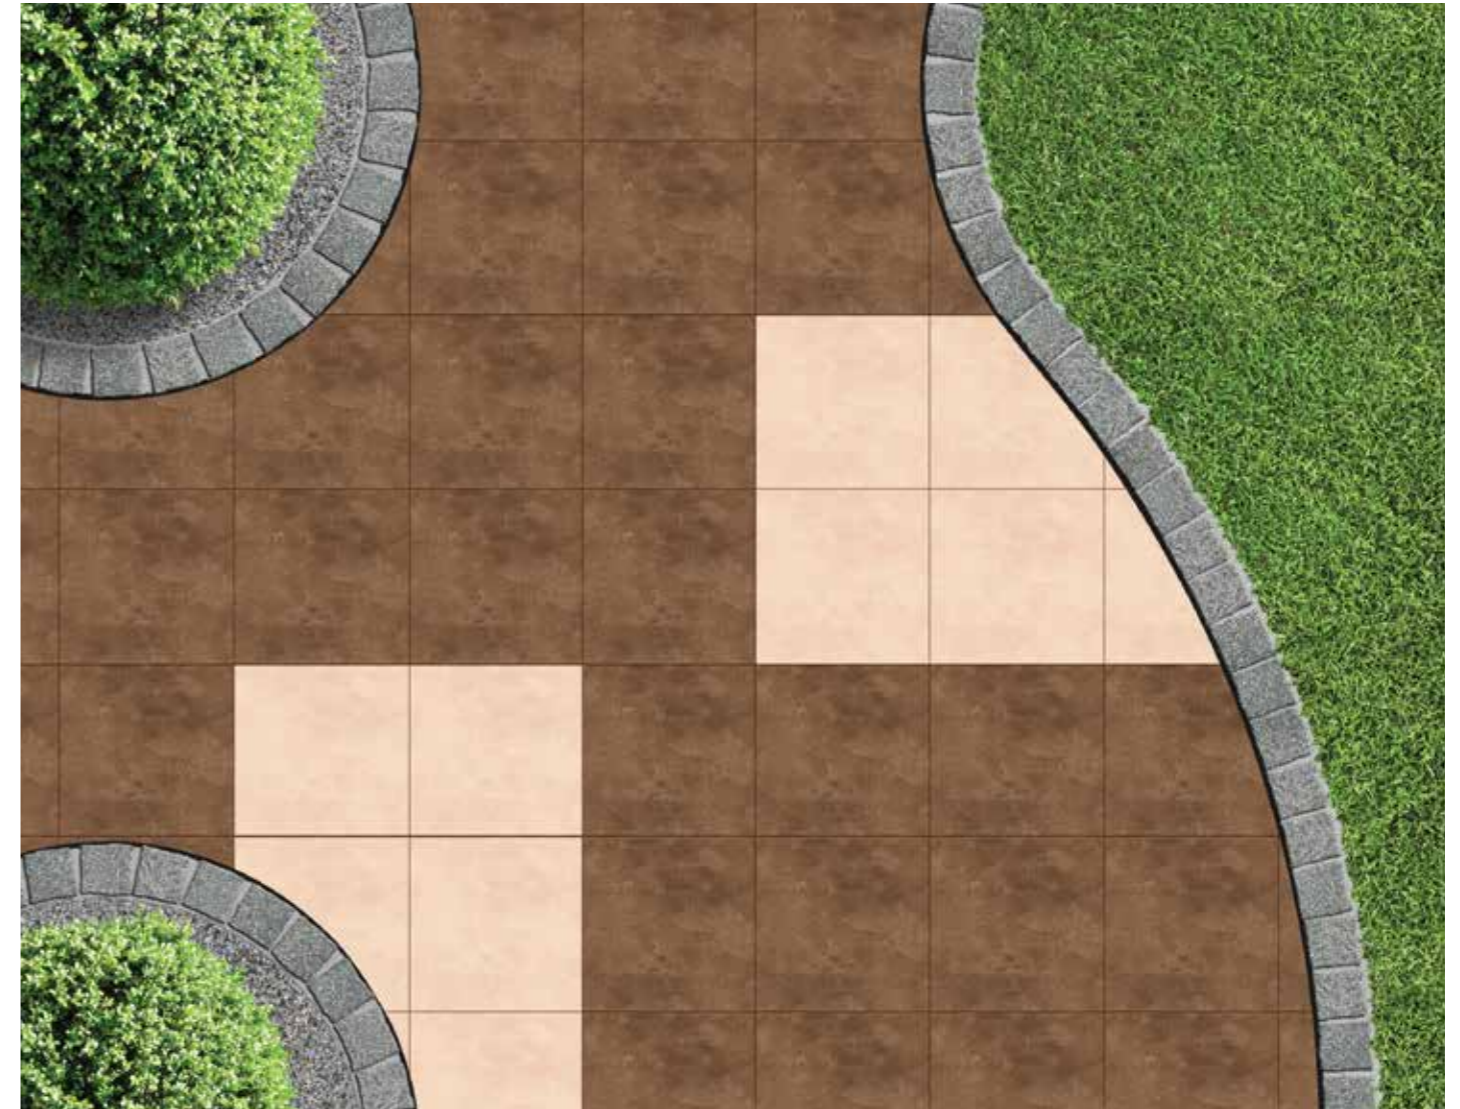

DIFFERENT PATTERN: Other color

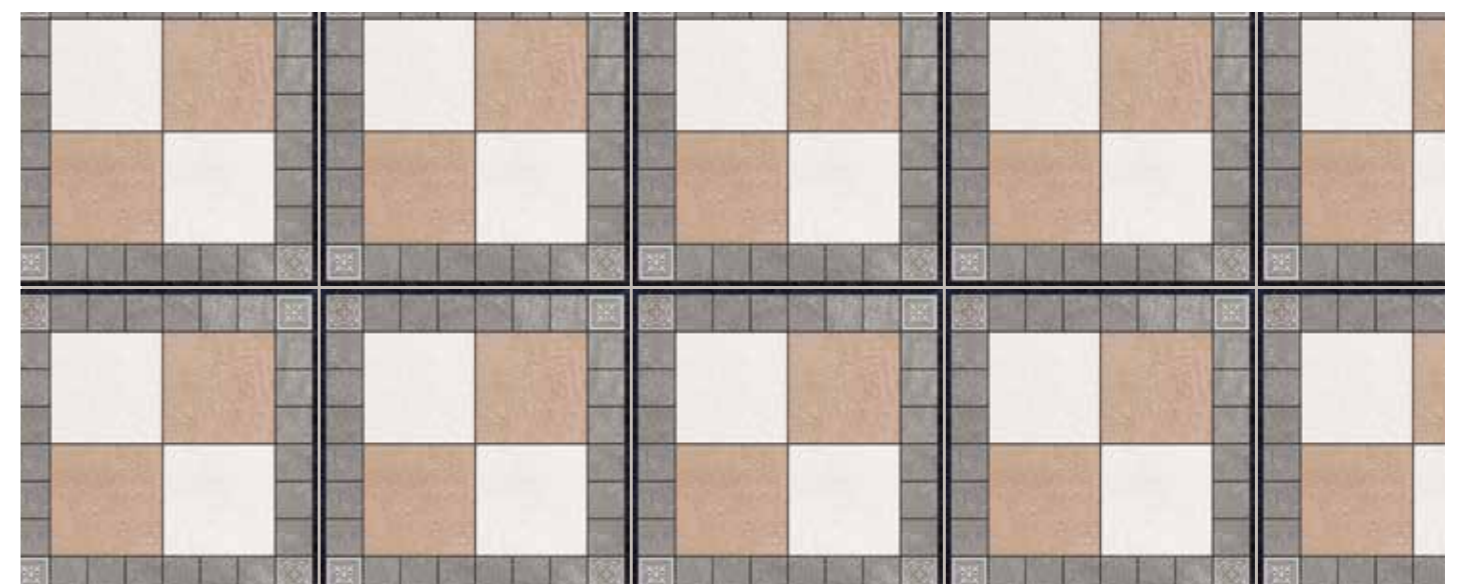

400 X 400 mm



RH\_07

12 mm




RH\_08

12 mm




RH\_09

12 mm

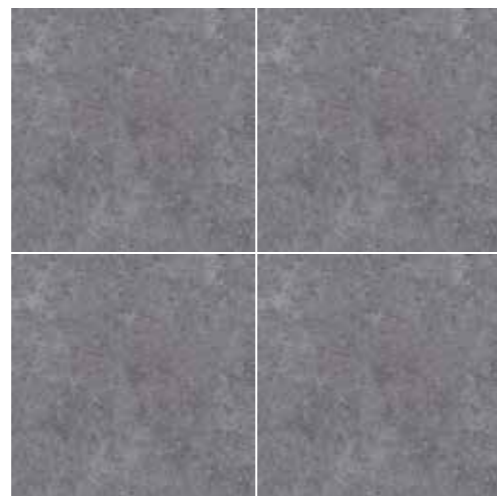


RH\_10

12 mm

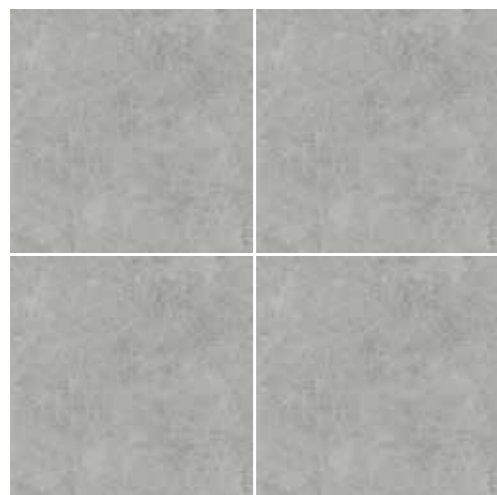


RH\_11

12 mm

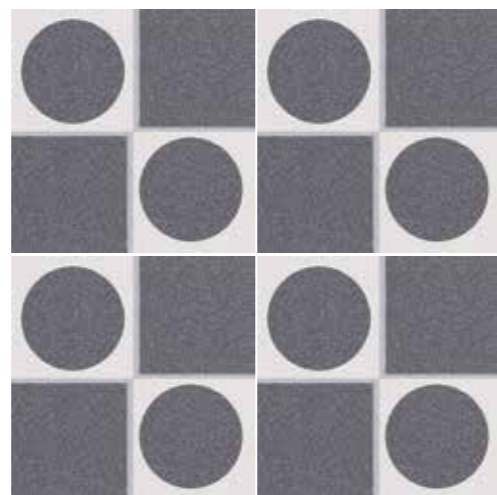


RH\_12

12 mm

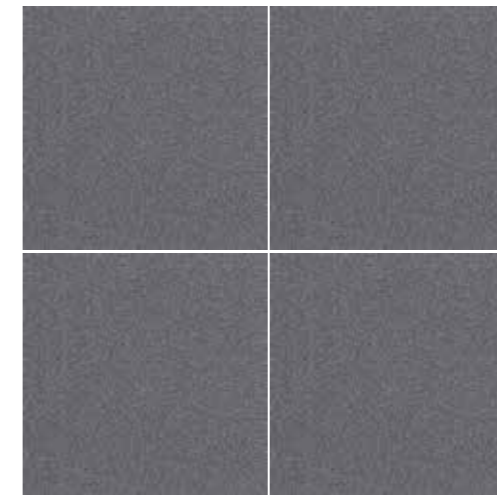


RH\_13

12 mm

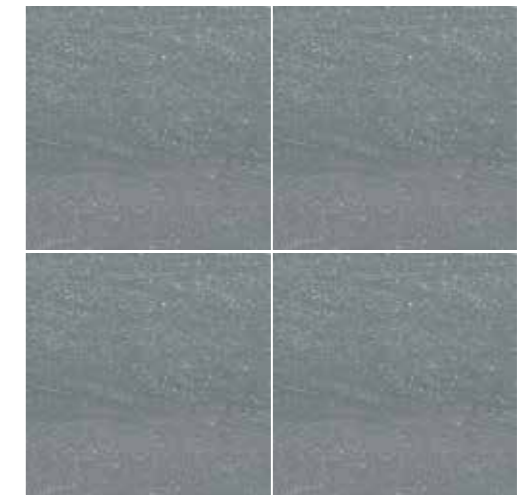

RH\_14

12 mm

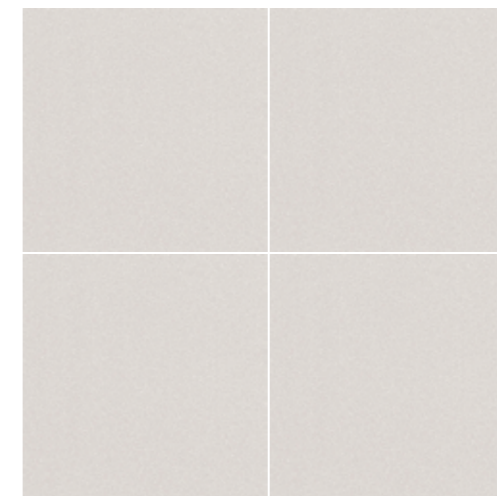

RH\_15

12 mm



RH\_16

12 mm

400 X 400 mm



DIFFERENT PATTERN: Other color



### TECHNICAL SPECIFICATION

Sr. No.	Property	International Std. ISO 13006/EN Group Bia	OUR VALUE
1	Deviation Length	+/-0.6%	+/-0.3%
2	Deviation in Thickness	+/-5%	+/-5%
3	Straightness of Sides	+/-0.5%	+/-0.5%
4	Rectangularity	+/-0.6%	+/-0.5%
5	Water Absorption	+/<0.5%	<0.2%
6	Mohs Hardness	>6	>6
7	Flexural Strength	>35N/mm <sup>3</sup>	>40N/mm <sup>3</sup>
8	Abrasion Resistance	<175mm <sup>3</sup>	<144mm <sup>3</sup>
9	Breaking Strength	1113 N	3500 N
10	Density / (g/cc)	>2.0	>2.4
11	Frost Resistance	Frost Proof	Frost Proof
12	Chemical Resistance	No Damage	No Damage
13	Thermal Shock Resistance	No Damage	No Damage
14	Colour Resistance	No Damage	No Damage
15	Thermal Expansion	<9x10 <sup>-6</sup>	<6x10 <sup>-5</sup> K <sup>-1</sup>
16	Stain Resistance	Resistant	Resistant
17	Moisture Expansion	Nil	Nil

### PACKING DETAIL

Size	Piece Per Box	Weight Per Box	Thickness (Approx)	Area Per Box
400 x 400 mm	5	19.5 kgs (Approx)	12 mm	0.80 Sq. Mtr.

### APPLICATIONS

